

Code No.	Model
----------	-------

Attachment

*Interchangeable with attachments form the E-max and ROTUS system.


- 1147** IR-310 (P13)
- 1005** IH-300 (P21)
- 2811** IG-400 (P21)
- 1016** HG-200 (P21)
- 1017** BMH-300 (P14)
- 1012** MFC-300S (P15)
- 1013** MFC-300M (P15)
- 1006** IC-300 (P16)
- 1014** KC-300 (P16)
- LUSTER
1302 LS-100 (P21)
- MINI-LUSTER
1307 ML-8 (P17)
- SWING-LUSTER
1380 SLS-16 (P18)
- Hammer Action Type
8060 HA-500 (P21)
- FINE BELT SANDER
1146 KBS-101 (P19)



LUSTER
1483 NLS-110 (P20)
Exclusive use for Emax EVOLUTION

• Wide selection of attachments available depending on the application.

Speed Reducer · Extension Joint

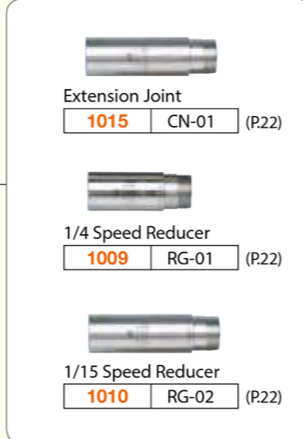

• May be connected between the motor and the attachment when required increased torque.

Motor

Emax EVolution Series



• Standard Type Motor with Cord (P10)
8086 ENK-410S 1,000~40,000 min.⁻¹

• Torque Type Motor with Cord (P10)
8087 ENK-250T 1,000~25,000 min.⁻¹

Exclusive use for Emax EVOLUTION

ROTUS Series



• Air Motor with Hose
360° Twist-Free Joint Mechanism (P40)
1004 IM-301 3,000~30,000 min.⁻¹

Controller



8224 (120V) NE249 120
8227 (230V) NE249 230 (P9)

• Foot Controller



8106 FC-64 (P22)

Sets



Emax EVolution Standard Set

Code No.	Model
8233 (120V)	EV410-120
8225 (230V)	EV410-230

Standard Equipment
 • Micro Grinder (IR-310+ENK-410S) : 1 pc.
 • Collet ø3.0 mm (CHH-3.0), ø2.35 mm (CHH-2.35) : 1 pc. each
 • Controller (NE249) : 1 pc.
 • Accessories : Handpiece Holder : 1 pc.
 Handpiece Stand : 1 pc.
 Power Supply Cord : 1 pc.
 Spanner (7 x 5.1) : 1 pc.
 Pin Spanner (K-233) : 2 pcs.
 L Shaped Spanner (9) : 1 pc.



ROTUS Standard Set

Code No.	Model
1163	ROTUS-IR

Standard Equipment
 • Air Grinder (IR-310+IM-301) : 1 pc.
 • Collet ø3.0mm (CHH-3.0), ø2.35 mm (CHH-2.35) : 1 pc. each
 • Air Line Kit (AL-H1207F) : 1 pc.
 • Foot Controller (AFC-45) : 1 pc.
 • Accessories : Piping Hose 2m (K-275) : 1 pc.
 Lubricating Oil (K-211) : 1 pc.
 Spanner (7x5.1) : 1 pc.
 Pin Spanner (K-233) : 2 pcs.
 L Shaped Spanner (9) : 1 pc.

Electrically Driven

Air Driven

⚠ Details of Maximum Allowable speed on intermittent use or continuous use P.13~22

<Caution>
*1 : Use 6 mm Torque Type HG-200 to connect ENK-250T