

Combination Example

「HES510 SERIES」 HES510-BT40 + EMCD-810-4M + E3000 + AL-C1204



1



2



3




4

「HES510-BT40」

	Code No.	Model	Description
1	1946	HES 510-BT40	HES510-BT40
2	9248	EMCD-810-4M	Motor Cord 4m
3	8421	E3000	E3000 Controller
4	4504	AL-C1204	Air line kit

50,000min⁻¹ Motor Spindle


HES 510-BT30 / NT30 (M)
 Max.rpm 50,000min⁻¹



HES 510-BT40 / NT40 (M)
 Max.rpm 50,000min⁻¹




HES 510-IT40
 Max.rpm 50,000min⁻¹



HES 510-BT50 / NT50 (M)
 Max.rpm 50,000min⁻¹




HES 510-IT50
 Max.rpm 50,000min⁻¹




HES 510-ST32
 Max.rpm 50,000min⁻¹



HES 510-HSK A63
 Max.rpm 50,000min⁻¹




HES 510-HSK A100
 Max.rpm 50,000min⁻¹



Safety function

HES510/810 have a motor cord with the safety coupling.

In case the machine spindle rotates by accident, the safety coupling disconnects by itself to minimize the damage both the machine and controller.

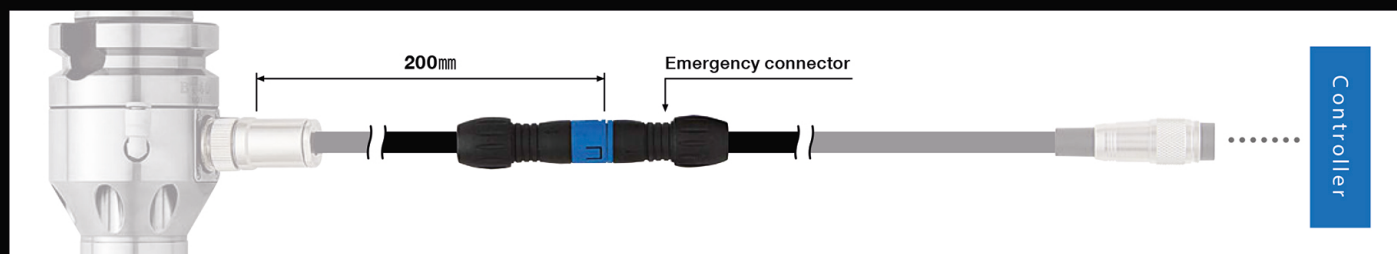

It is crucial to install the controller and the cable according to "OPERATION MANUAL" in order to function safety coupling properly.